

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets

(11) Publication number:

**0 282 157  
A1**

(12)

**EUROPEAN PATENT APPLICATION**(21) Application number: **88300851.8**(51) Int. Cl.4: **A61B 17/11**(22) Date of filing: **02.02.88**


The title of the invention has been amended  
(Guidelines for Examination in the EPO, A-III,  
7.3).

The title of the invention has been amended  
(Guidelines for Examination in the EPO, A-III,  
7.3).

(30) Priority: **11.02.87 US 13855**(43) Date of publication of application:  
**14.09.88 Bulletin 88/37**(84) Designated Contracting States:  
**AT BE CH DE ES FR GB GR IT LI LU NL SE**(71) Applicant: **AVANT, Odls Lynn**  
**4703 89th Street**  
**Lubbock Texas 79423(US)**(72) Inventor: **Avant, Odls Lynn**  
**4703 89th Street**  
**Lubbock Texas 79423(US)**  
Inventor: **Crawford, Duane A.**  
**4302 40th Street**  
**Lubbock Texas 79413(US)**(74) Representative: **Pacitti, Pierpaolo A.M.E. et al**  
**Murgitroyd and Company Mitchell House 333**  
**Bath Street**  
**Glasgow G2 4ER Scotland(GB)**(54) **Stapling apparatus for anastomosis, in particular for urethra-bladder anastomosis.**

(57) Apparatus for effecting anastomosis of the distal urethra (U) and the bladder (B) neck includes a tubular ureteral sound (12) with a threaded socket (13) on its distal end. An inflatable anvil (23) is connected to the threaded socket (13) on the ureteral sound (12) through an opening (130) in the urethra (U) adjacent the prostate (P) and the sound (12) is then retracted outwardly to position the inflatable anvil (23) in the urethra (U). A second implement (32) is passed downwardly through an incision (140) in the bladder (B) and is connectable to the inflatable anvil (23) by alignment (108, 110) and locking (96) means following surgical removal of the prostate (P). The inflatable anvil (23) and the second implement (32) respectively mount female (26) and male (28) connector members formed of material which will eventually dissolve in the human body. The male (28) and female (26) connector members are driven toward each other by the second implement (32) and male (28) means penetrates the tissue of the urethra (U) and the bladder (B) neck and then moves into the female (26) connector for engagement with locking means (88, 53) holding the two connector members (26, 28) together to clamp the urethra (U) to the bladder (B) neck to automatically

provide an anastomosis. The second implement (32) for severing the tissue in a circular manner, radially inward from the male/female members (26, 28) to provide a clear internal opening (158, 160) for flow from the bladder (B) to the urethra (U). A catheter (30) is attached to the inflatable anvil (23) and upon removal of the second implement (32) is positioned in the bladder (B) which is then closed (151) by conventional surgical procedures. The anvil (23) is deflated and withdrawn outwardly through the urethra (U) to position the catheter (30) for bladder (B) drainage during healing of the anastomosis.

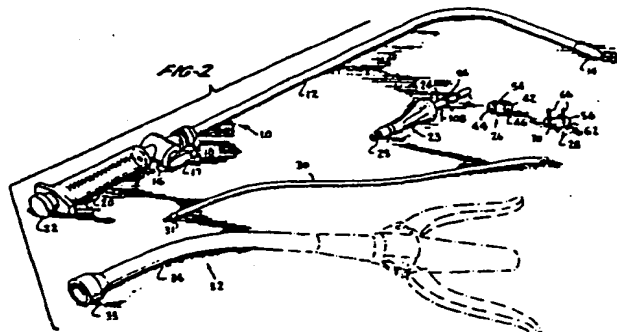

EP 0 282 157 A1

**STAPLING METHOD AND APPARATUS FOR VESICLE-URETHRAL REANASTOMOSIS FOLLOWING RETRO-PUBIC PROSTATECTOMY AND OTHER TUBULAR ANASTOMOSIS**

**Background of the Invention**

The present invention is in the field of surgical apparatus and methods and is more specifically directed to apparatus and methods for effecting a radical prostatectomy which avoids the shortcomings of the prior known procedures for such operations. The invention is also intended for general use in tubular anastomosis.

Impotence frequently results from radical prostatectomy operations as a consequence of injury to the branches of the pelvic plexus that are necessary for the sexual function. Additionally, incontinence is also regrettably a frequent occurrence resulting from prior known radical prostatectomy procedures. The occurrence of most cases of impotence and incontinence arises as a consequence of three factors inherent in present procedures. The first factor the presently employed surgical procedures involved in the anastomosis of the distal urethra and the bladder neck results in trauma and injury to the nerves adjacent the apex of the prostate and the urethra. The second factor is post-operative leakage resultant from the fact that the anastomosis is frequently not liquid-tight so that urine leaks outside the anastomosis, resulting in scarring and distortion of the bladder neck with possible encasement of the nerves. The third factor is obstructions from intra-luminal bladder neck contracture.

The prior procedures for effecting anastomosis require the surgeon to suture the urethra in a "blind" area beneath the symphysis pubis in which it is not possible to see the area being sutured. Consequently, imperfect anastomosis and nerve damage frequently result. Moreover, the prior known surgical procedures employed in the anastomosis suffer from the further shortcoming of being extremely time consuming and tedious, factors which decrease the surgeon's skill and the patient's stamina.

While prior devices such as that shown in U.S. Patents Nos. 4,304,236, 4,485,817 and 4,553,543 have been proposed for performing anastomosis of large body ducts or lumens such as the bowel, such devices are not usable for joining the smaller body tubes such as the urethra due, among other things, to their large size and the fact that they cannot be scaled down to a sufficiently small size as to be usable in the urethra.

**Summary of the Invention**

The present invention overcomes the aforementioned shortcomings of the prior apparatus and procedures through the provision of a unique apparatus and method for reconnecting the distal urethra to the bladder neck with a minimum trauma to the branches of the pelvic plexus controlling the sexual function and with almost certain avoidance of urine leakage following the anastomosis. More specifically, a urethral sound of hollow tubular construction is provided with a threaded socket on one end which is passed inwardly along the length of the penile urethra to a position adjacent the apex of the prostate. The dorsal vein is ligated and transected and a urethrotomy is performed to permit the threaded socket end portion of the urethral sound to pass outwardly of the urethra. Following positioning of the end of the urethral sound externally to the urethra, a rounded guide tip is removed from the threaded socket and an inflatable anvil assembly which includes an annular connector component mounted on a support portion is threaded into the threaded socket on the end of the urethral sound. The inflatable anvil component is sufficiently small as to be fitable in the urethra upon a partial withdrawal movement of the urethral sound. A rigid core tube extends outwardly from the urethrotomy and the urethra is then sutured about the core tube and the urethra is transected between the suture and the prostate. The severed end of the dorsal vein complex and the prostate are then dissected retrograde toward the bladder neck to leave a relatively large opening in the bladder wall. A drainage catheter has one end threadably attached to the outer end of the core tube. The core tube which extends from the inflatable anvil, and the attached drainage catheter are then positioned in the opening in the bladder wall and the bladder wall is then sutured together to provide an annular bladder duct encircling the core tube. Pressurized sterile fluid is injected through the urethral sound and the core tube to inflate and rigidify the inflatable anvil. A first annular connector component formed of soluble material which will dissolve in the body after a certain number of days is positioned on the inflatable anvil.

A cystotomy is then provided in the bladder upwardly above the area in which the core tube is positioned and an elongated housing of a second operator is moved downwardly through the access opening. The second operator includes an internal support tube having an opening in which the core tube end can be matingly received. Further, mating

lug and slot means on the core tube and the support tube ensure proper alignment of the core tube and the support tube. A drive tube is mounted inside the elongated housing for reciprocation on the support tube and includes means for supporting a second annular connector component formed of the same soluble materials as the first annular connector component. One of the annular connector components includes female socket openings mounted about an annular base plate which receive male prongs extending from an annular base plate of the other connector component. The drive tube is actuated to move the second connector component forwardly so that the male prongs are inserted in the female sockets and the circular base plates of each of the connector components press the annular bladder tissue against the urethral tissue formed at the transection of the urethra. During the aforementioned procedures, the rigid anvil provides a backing for the connector component mounted on it to prevent movement of the connector component which would otherwise occur during the clamping of the tissue and connection of the connector components. The male prongs and female sockets have mutually engageable retention means which prevent the male prongs from being withdrawn from the female sockets after insertion so that the joined portions of the urethra and the bladder are clamped together and held together in an annular manner about a 360 degree circle to ensure that a non-leaking fluid tight connection is effected. Additionally, a circular blade provided on the drive tube severs inner circular portions of the tissue to provide tissue specimens which are later usable for biopsy purposes.

After the urethra and the bladder sections have been joined, the second operator is withdrawn outwardly through the access opening in the bladder which is then closed by conventional suturing techniques. The fluid pressure in the inflatable anvil is then vented through the urethral sound to deflate the anvil and the urethral sound is then withdrawn from the urethra and carries the deflated anvil with it. Additionally, the outer end of the drainage catheter which had been attached to the end of the core tube and positioned in the bladder prior to closure of the opening in the bladder is withdrawn outwardly through the urethra until its outer end is fully clear of the outer end of the urethra with its inner end remaining in the bladder to provide bladder drainage.

The entire procedure is effected with a minimum chance of damage to the sexual function controlling nerves and with an optimum likelihood of securing a fluid tight connection between the

urethra and the bladder. Moreover, the entire procedure can be performed much more quickly than is possible with present known apparatus and methods.

#### Brief Description of the Drawings

Figure 1A is a perspective view of the human prostate, bladder and associated organs illustrating an initial step in practice of the invention by the preferred embodiment thereof;

Figure 1B illustrates a subsequent step to that of Figure 1A in the practice of the inventive method;

Figure 1C illustrates a step subsequent to the step of Figure 1B in the inventive method;

Figure 1D illustrates a step subsequent to that of Figure 1C;

Figure 1E illustrates a step subsequent to that of Figure 1D;

Figure 1F illustrates a step subsequent to that of Figure 1E;

Figure 2 is a perspective view of the separate components of the preferred apparatus used in practice of the present invention;

Figure 3 is a side elevation view of an annular female connector member;

Figure 4 is a front elevation view of the female connector member of Figure 3;

Figure 5 is a rear elevation view of the female connector member of Figure 3;

Figure 6 is a side elevation view of an annular male connector member;

Figure 7 is a front elevation view of the male connector member of Figure 6;

Figure 8 is a rear elevation view of the male connector member of Figure 6;

Figure 9 is a bisecting sectional view taken along lines 9-9 of Figure 10;

Figure 10 is a sectional view taken along lines 10-10 of Figure 9 and illustrates the positioning of the components in the same position as shown in Figure 1E prior to the actuation of means for effecting connection of the urethra to the bladder;

Figure 11 is a sectional view similar to Figure 10, but illustrating the parts in a subsequent position assumed following actuation of connector effecting means for connecting the posterior urethra end to the bladder wall;

Figure 12 is a bisecting sectional view similar to Figure 10, but illustrating the subsequent step of removal of the connector effecting means away from the juncture of the urethra and the bladder wall following the connection effecting step illustrated in Figure 11;

Figure 13 is an enlarged bisecting sectional view of the connection between the posterior end of the urethra and the bladder; and

Figure 14 is a sectional view taken along the lines 14-14 of Figure 10.

#### Description of the Preferred Embodiment

Attention is initially invited to Figure 2 which illustrates the different parts of the invention in a pictorial manner and which includes six major components 10, 23, 26, 28, 30 and 32.

More specifically, the main components include an externally manipulated operator 10 and which consists of an elongated rigid hollow tubular catheter or urethral sound 12 having an axial passageway 11 and a threaded aperture or socket 13 at its outer or distal end in which a removable rounded-end tip 14 is mounted. A spool valve 16 is connected by a connector 18 to the opposite end of the elongated hollow catheter or urethral sound 12 and is connected on an opposite side to a syringe or other piston-cylinder means 20 (or other pressure/vacuum means) including an outer cylinder and an internal piston member actuated by an outer thumb knob 22 which can be moved axially within the syringe 20 to force fluid therein through valve 16 and then into the elongated hollow catheter 12 for a purpose to be discussed. Also, it should be noted that fluid forced into the catheter 12 can be retained therein by closure of a valve actuator member 17 in an obvious manner.

Other features of the preferred embodiment include an inflatable anvil assembly which is generally designated 23 in Figure 2 and which is connectable to the threaded socket 13 of the elongated hollow urethral sound 12 following removal of the rounded-end tip member 14. More specifically, the inflatable anvil assembly 23 includes an elongated rigid hollow anvil core tube 24 having a threaded end portion 25 which is connectable to the threads in socket 13 in the outer end of the hollow tube member 12 after the tip member 14 has been removed so as to provide communication between the passageway 11 in tube 12 and an internal bore 73 in core tube 24. Hollow anvil tube 24 also includes an outer threaded socket 25' in the outer end portion of tube 24.

Member 30 comprises a conventional flexible catheter having a threaded connector 31 on one end of which is engageable with the threaded socket 25' in the outer end of the hollow core tube 24.

Lastly, a connector actuator 32 includes a main tubular housing 34 having a distal end 33 which is connectable with alignment means on the outer end of the inflatable anvil core tube in a manner to be described in detail. Actuator 32 is manually

activated for effecting connection of the urethra to the bladder by male and female connector means to be discussed. During such actuation, the actuator is coupled to inflatable anvil assembly 23 which is in turn coupled to member 12.

Additionally, the preferred embodiment also includes a circular female connector component 26, and a circular male connector component 28 which two components, 26 and 28, are made of soluble material. The male connector component 28 is engageable with the circular female connector component 26 for connecting the severed end of the urethra to the bladder in a manner to be discussed in detail hereinafter.

The female and male connector components 26 and 28 are both made of a biodegradable soluble material which eventually dissolves in the human body, such as the soluble suture material manufactured by Ethicon, Inc. of Somerville, New Jersey. Other biodegradable polymers that may be used for components 26 and 18 are disclosed in U.S. Patents 3,297,033; 3,463,158; 3,597,449; 3,620,218 and 3,875,937. Initial reference is made to Figures 3, 4 and 5 which illustrate the female connector component 26. The female connector component 26 comprises an annular base plate 36 having an inner surface 38 defining a flow-through opening and an outer surface 40. The annular base plate 36 also has a mounting face 42 from which mounting and positioning pins 44 extend and from which female connector socket tubes 46 also extend with their axes perpendicular to the plane of the annular base plate 36. The face of the annular base plate 36 opposite the mounting face 42 comprises a clamping face 48 from which guide cones 50 extend in axial alignment with respective ones of the female connector tubes 46 with each guide cone including a flared conical surface 52 which is larger at its outer end (the end spaced the greatest distance from clamping face 48) and which merges at its inner end with a respective one of openings 47 extending through each respective female connector tube 46. One-way annular lock ribs 53 are provided on the interior of each axial opening 47 in each tube 46 as shown in Figure 10. Additionally, four oval clamping dimples 54 extend outwardly from the clamping face 48.

The circular male connector component 28 illustrated in Figures 6, 7 and 8 includes an annular base plate 56 which is of the same size and shape as annular base plate 36 of the female connector and includes an inner surface 58 defining an opening in alignment with (when mounted in the assembly) and in exactly the same size as the opening defined in the base plate 36 by surface 38. The annular base plate 56 includes a mounting face 60 from which four mounting and positioning pins 62 extend. An opposite clamping face 64 is provided

with four outwardly extending male connector pins 66 each having a plurality of conical flanges each defining a circular outer lip 68 having a diameter slightly greater than the diameter of the one-way annular lock ribs 53 extending the length of the female connector tubes 46, but not being deflatable during insertion of the male connector pins through the opening 47 in the female connector tube. After insertion of the male connector pins, ribs 53 and lips 68 interact to prevent removal of the connector pins 66 from the female connector tubes 46. Additionally, clamping face 84 also includes four oval clamping dimples 70 which are of identical size and shape to that of dimples 54 of the female connector. The dimples 70 are positioned to face the flat surface 48 of the female connector component 26 and are not in alignment with the dimples 54 of the female connector component when the female and male connector components are connected together in a manner to be discussed.

The rigid anvil core tube 24 of the inflatable anvil assembly 23 has axial bore 73 which communicates with a plurality of radial bores 92 found in core tube 24. A ring seal 76 is provided between the end of the elongated hollow tube 12 and a shoulder 78 on the outer surface of tube 24 as best shown in Figure 12 for example. An inflatable anvil bladder 80 encircles the tube 24 and has a base end 82 positioned in a recessed seat 84 provided in the outer surface of the core tube 24 with a clamp band 86 clamping the base in 82 in a pressure resistant manner to the outer surface of the tube 72 as shown in Figure 12. The inflatable anvil bladder 80 is unitarily formed preferably of polyethylene material such as that used in inflatable catheters sold by American Edwards Laboratories of Santa Ana, California, and includes major components comprising an outer envelope 81, a radial annular clamp portion 83 and in an interior envelope 88 which is generally of conical configuration when the anvil bladder is in its inflated rigid condition illustrated in Figure 10. The inner end 90 of the interior envelope portion 88 is molded to the outer surface of core tube 24 and is normally in a tensioned condition so as to maintain a fluid tight seal (under high pressure) between the inner end 90 and the outer surface of tube 24. Alternatively, a metal clamp could also be used for clamping end 90 to the outer surface of core tube 24 if desired.

Radial apertures 92 are provided in tube 24 to provide pressure-vacuum communication with the axial bore internal passageway 73 so that fluid provided into the passageway 73 flows outwardly into the space between the inner surface of the outer envelope 81 and the interior envelope 88 and the outer surface of the tube 24 between the sealed portions 82 and 90 as shown in Figure 10.

Additionally, mounting sockets 93 are sized and positioned to receive the positioning pins 44 of the circular female connector 26 for holding same in position for permitting connection of the male connector as will be discussed.

Additionally, the inflatable anvil bladder 80 includes radial strengthening vanes 95 molded to tube 24 as shown in Figure 14; however, it should be understood that vanes 95 are optional and may not be essential to successful operation of the device. Further, an alignment lug 108, is provided near the outer end of the metal tube 24 for engagement with a mating slot 110 provided in an internal support sleeve 112 of the actuator device 32. Radial bore 100 provided at the outer end of axial bore 73 communicates with an annular space within the confines of an annular locking bladder 96 which is clamped in a groove 102 at opposite ends by clamp members 104 and 106 (Figure 11) so that pressure introduced into bore 73 tends to bulge the annular locking bladder 96 outwardly for a purpose to be discussed.

Internal support sleeve 112 of the actuator 32 is fixedly and axially positioned within an enlarged head 33 provided on the end of a main tubular housing 34 of actuator 32 and provides support for a sliding drive tube 114 which is mounted on sleeve 112 for reciprocation between two positions respectively illustrated in Figures 10 and 11. It will be observed that drive tube 114 includes a slot 116 in which a stop pin 118 is positioned for limiting the extent of movement of the drive tube 114. A cylindrical blade 120, having a sharp circular outer edge 122, is attached to the forward end of the drive tube 114 for movement therewith. The outer diameter of the circular blade 120 is slightly less than the inner diameter of the opening provided in the male connector member 28 and the head 33 is provided with a plurality of pin receiving support openings 124 for receiving the pins 62 of the male connector members so that the male connector pins 66 are supported in axial alignment with the openings 47 of the female connector members.

The drive tube 114 is reciprocated by conventional drive means such as, for example, drive means employed in existing surgical stapler devices. An example of a satisfactory drive means is that shown in U.S. Patent No. 4,304,236 for driving tube 50 of said patent. Alternatively, a dual-handle drive assembly as shown in phantom in Figure 2 or a hydraulic system similar to that of U.S. Patent No. 4,485,817 or a mechanical system as in U.S. Patent No. 4,204,623 could be employed.

The manner of using the inventive apparatus will now be discussed with initial reference being made to Figure 1A. The patient will be anesthetized and the removable rounded-end tip 14 will be threaded into the end of the elongated urethral

sound 12. Conventional surgical techniques employing a verticle infra umbilical incision will be employed to render the bladder B and the urethra U accessible to the surgeon as shown in Figure 1A. Elongated hollow urethral sound 12 will then be inserted externally from the outer end of the urethra through the urethra to a position substantially as shown in Figure 1A, but will be inside the urethra with the forward end 14 extending into the apex of the prostate P. Dorsal vein V is then ligated and transected and an initial urethrotomy 130 is then provided in the urethra of sufficient size to permit the end tip 14 and the outer portion of urethral sound 12 to be pushed outwardly through the urethrotomy 130, as shown in Figure 1A; however, it should be understood that the urethra is not completely transected at this time. The removable rounded-end tip member 14 is then removed from the tube 12 and will not be of any further use in the procedure.

The deflated inflatable anvil assembly 23 and a female connector component 26 mounted thereon are then threaded into the internally threaded socket 13. The urethral sound 12 is then moved outwardly and the assembly is manipulated to fully position the inflatable means 81, 88 of the inflatable anvil assembly 23 inside the urethra with the end of core tube 24 protruding outwardly through the urethrotomy 130, as shown in Figure 1B. The urethra is snugly engaged with the outer surface of protruding core tube 24 by a suture, as shown at 132, with the end of core tube 24 extending outwardly beyond the urethra. Catheter 30 is then threaded into socket 13 and the urethra is completely severed to provide a severed end 130 as shown in Figure 1C. The prostate is then peeled back toward the head end and the distal vein complex C and the prostate are severed from the bladder to leave an elongated opening having sides 136 and 138 as shown in Figure 1C.

A cystotomy 140 is provided in an upper portion of the bladder B and the actuator housing 34 is passed downwardly through the cystotomy to position head 33 and a male connector component 28 mounted therein in the bladder shown in Figure 1D. The area inside the head 33 of the actuator will be as shown in Figure 10 with the male connector member 28 being positioned within the head. The end of the catheter will then be passed upwardly into the internal sleeve 112 and alignment lug 108 will be positioned in slot 110 to insure the male connector pins of the male connector component 28 are axially aligned with the openings 47 in the female connector component 26.

Valve 16 is then opened and syringe 20 actuated to force fluid 94, such as a sterile saline solution, through the tubes 12 and 24 to inflate the inflatable anvil bladder 80 so that it assumes the

shape shown in Figure 10. Inflation of anvil bladder 80 causes the bladder to expand outwardly to radially distend the urethra against the dorsal vein to effect substantial compressive closure of the vein and permit relegation of the vein if necessary. Optionally, the initial ligation and transection of the dorsal vein can be performed at this time instead of immediately following the urethral sound as discussed above.

Injection of fluid into core tube 24 will also cause the annular locking bladder 96 to bulge outwardly into contact with the inner surface of internal sleeve 112 to rigidly lock members 24 and 112 together so as to prevent any relative axial movement of core tube 24 relative to sleeve 112. Valve 16 will then be closed to maintain pressure inside the anvil member so that it remains in its inflated condition. The male connector 28 is consequently insured of remaining in proper alignment with the female connector 26 by virtue of the fact that the positioning of lug 108 in slot 110 cannot be discontinued.

Suturing of the sides 136 and 138 together is completed to provide an opening through the bladder wall which is in the form of a circular neck portion of bladder tissue 148 engaging the outer surface of core tube 24 as shown in Figure 1. Similarly, the urethra has tissue portions 150 engaging the outer surface of core tube 24 and resting against annular stop 98, fixed to tube 24 as shown in Figure 10. The entire assembly is consequently ready for actuation to effect a connection between the bladder and the urethra.

The conventional drive means in actuator 32 is then actuated to cause the drive tube 114 to move to the left in the direction of arrow A in Figure 11 from its position on support tube 112 in Figure 10 to the position shown in Figure 11. Such movement affects two very important operations. Firstly, the male connector member is forcefully moved so that the male connector pins 66 penetrates the bladder and the urethral tissue and then moves into and through the openings in the female connector tubes 46 and are locked therein so as to clamp the bladder to the end of the urethra. Secondly, the movement of the circular blade 120 severs the portions 148 and 150 of the bladder and urethra, to respectively provide smooth edge surfaces 158 and 160, respectively, and the severed portions move into the interior of the blade as shown in Figure 11 where they remain for subsequent availability in biopsy purposes if desired. In addition, the cutter removes tissue in a circular fashion providing a clean-cut interior luminal circumference for the anastomosis which would minimize flow obstruction and maintain a superior hydraulic radius to flow.

Valve 16 is then opened and syringe 20 ac-

tuated to withdraw the fluid from inside the inflatable anvil bladder 80 and the annular locking bladder 96. Actuator 32 is withdrawn through the access opening 140 and the opening is sutured or stapled together as shown at 151. The urethral sound 12 is then moved outwardly through the urethra with such movement pulling the anvil assembly 23 and catheter 30 outwardly with the sound. Outward movement of the urethral sound 12 is terminated after connector 31 clears the urethra meatus and the connector 31 is disconnected from the threaded socket 25 so as to leave the catheter 30 in position for effecting bladder drainage. After several days, the catheter 30 can be removed in a well known manner. The male and female urethra and bladder have grown together to provide a permanent connection therebetween.

While the preferred embodiment of the invention is directed to prostate removal, it should be understood that the spirit and scope of the invention is not limited to prostate operations. In fact, the inventive apparatus and method can be employed for joining other tubular body parts such as the esophagus, intestines, urethra, bowel ducts and the like. Also, the invention can be employed for joining the urethra of females to repair traumatic injury such as may occur in accidents or occasionally in childbirth.

## Claims

1. An apparatus for effecting anastomosis of two hollow tube-like body members by first and second connector components, said apparatus comprising:

(a) A first connector component supporting means having a distal end for supporting a first connector component and dimensioned to be inserted in and through a first tube-like body member to position said distal end generally adjacent a part of said first body member to be joined to a second body member;

(b) a second connector component supporting means having a distal end and dimensioned to be inserted in and through a second tube-like body member to position its distal end adjacent a portion of said second tube-like body member to be joined to said first body member;

(c) cooperating aligning and connecting means in said first and second connector component supporting means for locking their distal ends in axially aligned end-to-end relationship and for clamping the said tube-like body members together at their portions to be joined;

(d) first and second connector components one of which is mounted on said first connector component supporting means and the other of

which is mounted on said second connector component supporting means, said connector components having alignable mating components comprising male means on one connector component and female means on the other connector component which interlock to prevent separation upon movement of the male means into the female means; and

(e) drive means for driving one of said connector components toward the other of said connector components to cause the male means to penetrate the clamped tube-like body members and enter the female means so as to interlock therewith to effect connection of the two tube-like body members.

2. An apparatus as recited in claim 1 wherein said drive means is on said second connector component supporting means and said first connector component supporting means includes an inflatable envelope on which said first connector component is mounted and means for injecting pressurized fluid into said inflatable envelope for rigidifying same so as to resist axial movement of said first connector component when said drive means is actuated.

3. The apparatus of claim 2, wherein each of said connector components has a base plate of generally annular configuration on which said male means and female means are respectively mounted.

4. The apparatus of claim 3, wherein said first and second connector components are formed of material which dissolves in response to being positioned in the human body for a predetermined minimum time period.

5. The apparatus of claim 4 additionally including annular knife means mounted on said drive means engaging and severing said annular tissue portions of said tube-like body members along a cylindrical surface radially inward of the tissue portions of the clamped tube-like body members penetrated by the male means.

6. The apparatus of claim 4 additionally including catheter means positioned internally of said second connector component supporting means and having one end connected to the distal end of said first connector component supporting means.

7. The apparatus of claim 1 wherein said first tube-like body member is the human urethra and said second tube-like body member is the human bladder and wherein said drive means is on said second connector component supporting means and said first connector component supporting means includes an inflatable envelope on which said first connector component is mounted and means for injecting pressurized fluid into said inflatable



able envelope for rigidifying same so as to resist axial movement of said first connector component when said drive means is actuated.

8. The apparatus of claim 7, wherein each of said connector components has a base plate of generally annular configuration on which said male means and female means are respectively mounted; and

9. The apparatus of claim 8 additionally including annular knife means mounted on said drive means engaging and severing said annular tissue portions of said tube-like body members along a cylindrical surface radially inward of the tissue portions of the clamped tube-like body members penetrated by the male means.

10. The apparatus of claim 9 additionally including catheter means positioned internally of said second connector component supporting means and having one end connected to the distal end of said first connector component supporting means.

5

10

15

20

25

30

35


40

45


50

55


**FIG-1A**

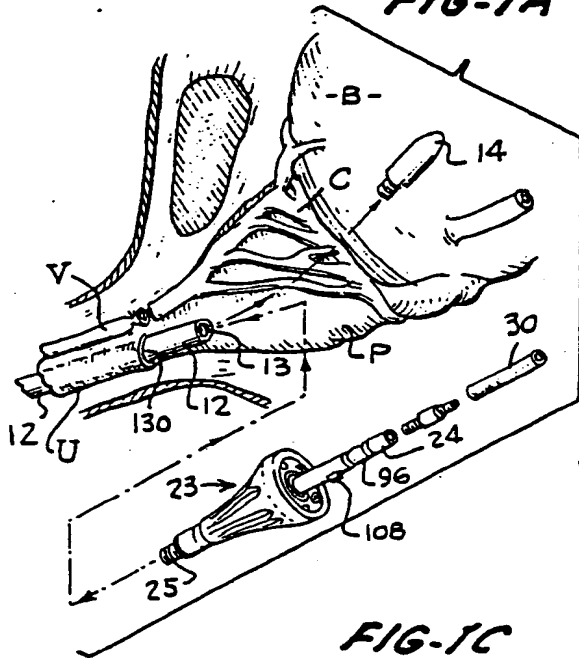


**FIG-1B**

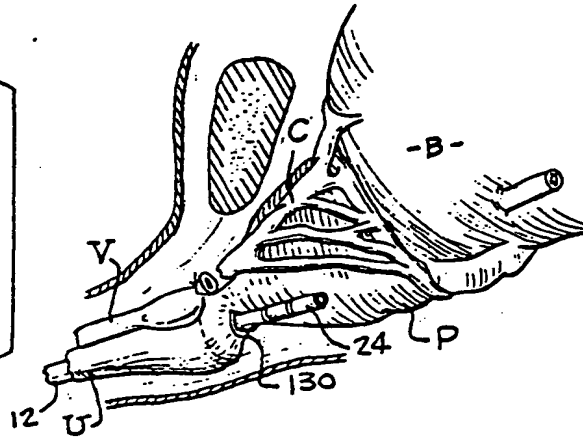


**FIG-1C**

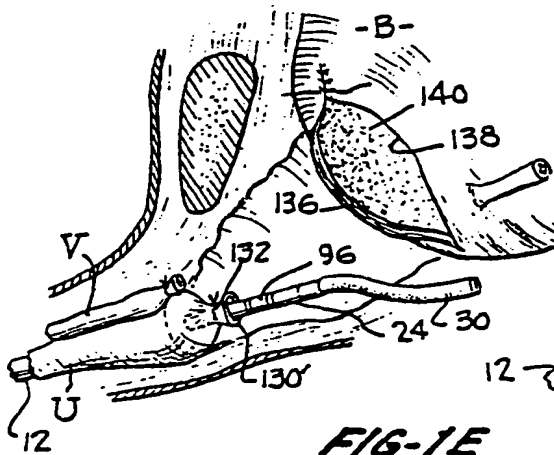


**FIG-1D**

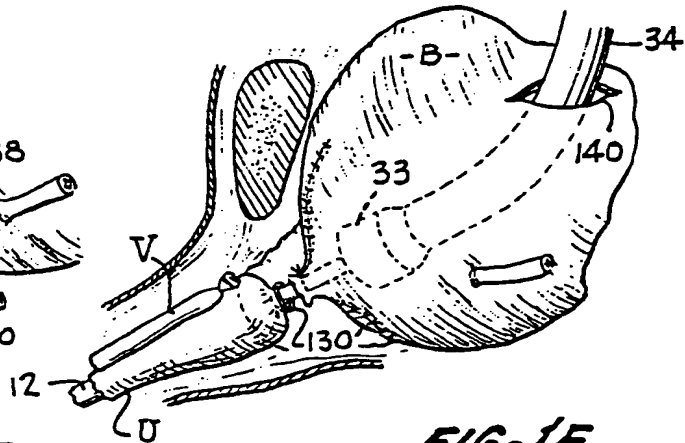



**FIG-1E**


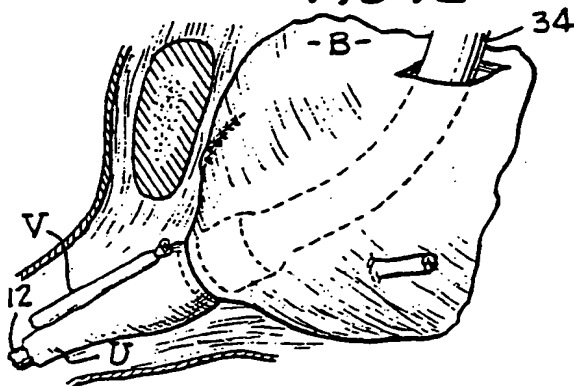





**FIG-1F**

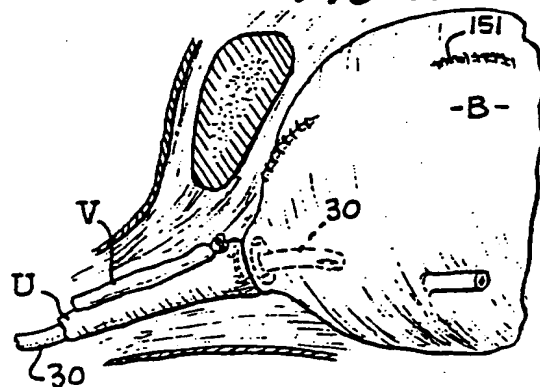

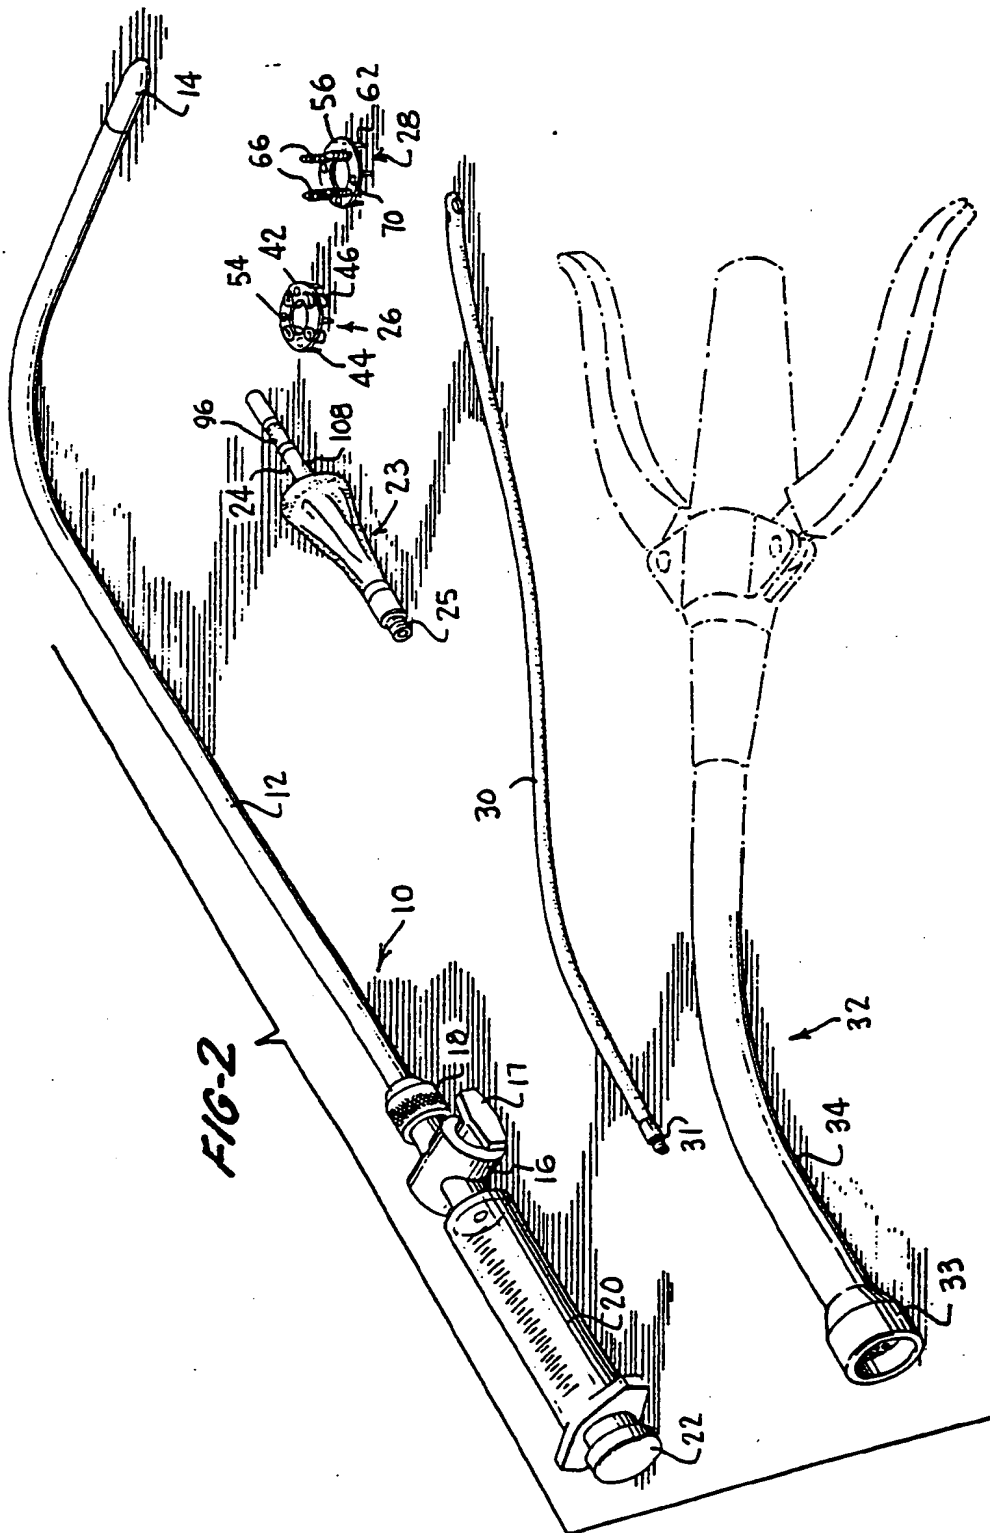

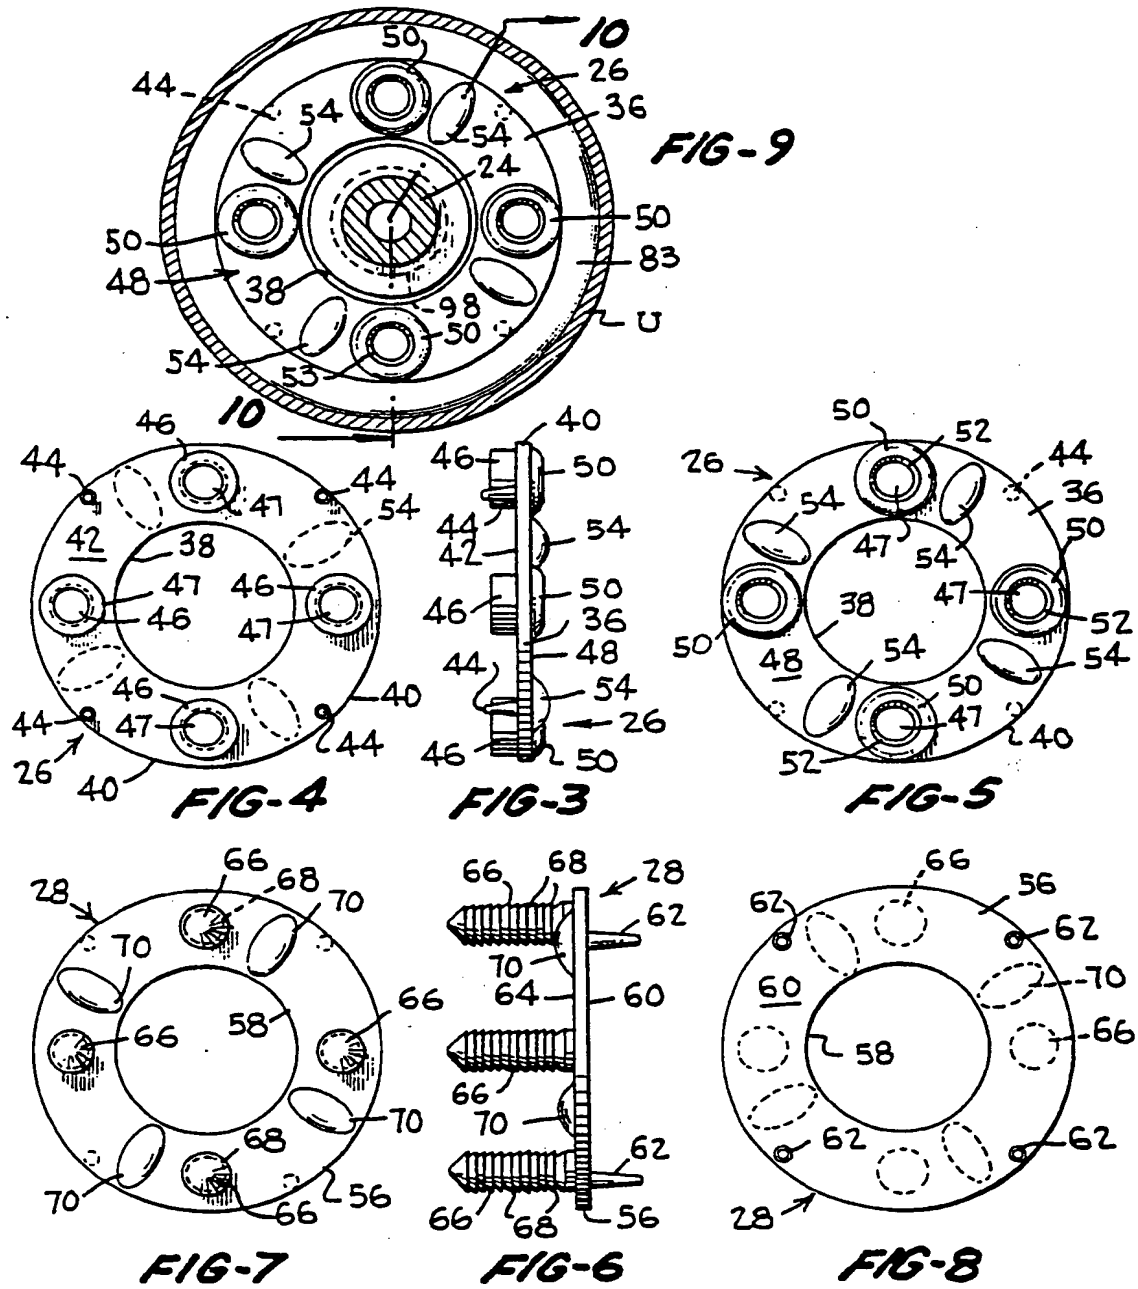

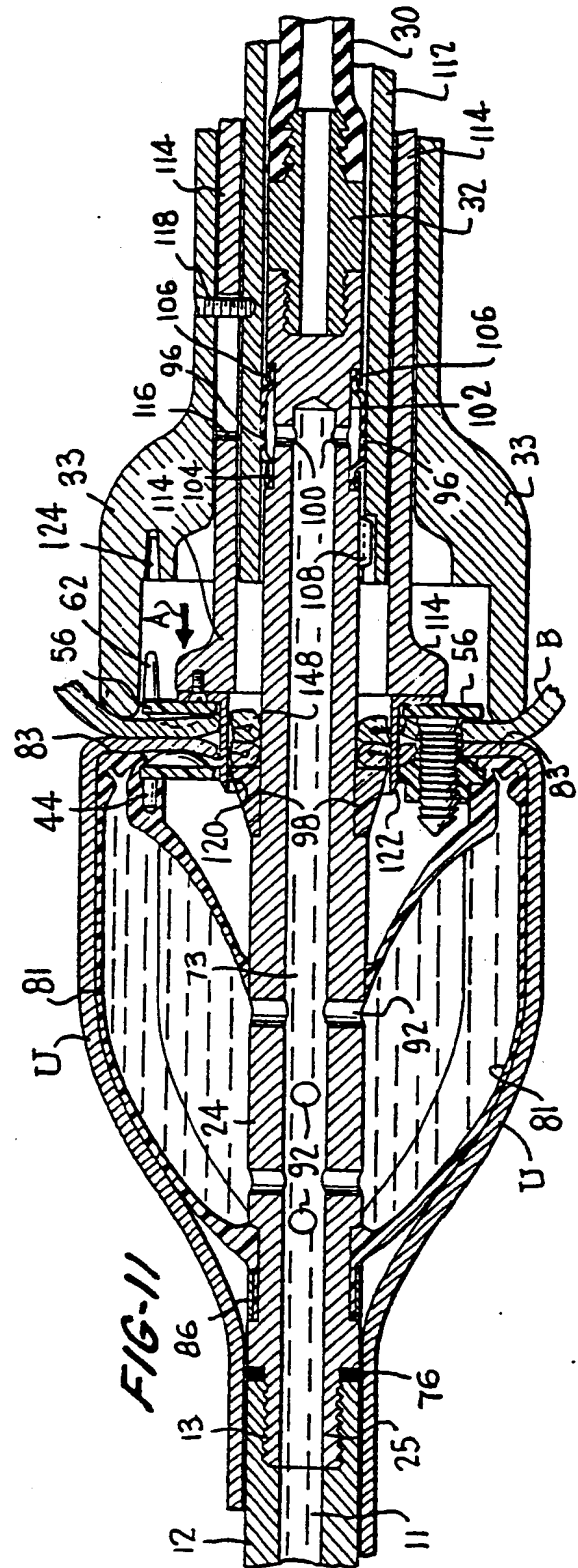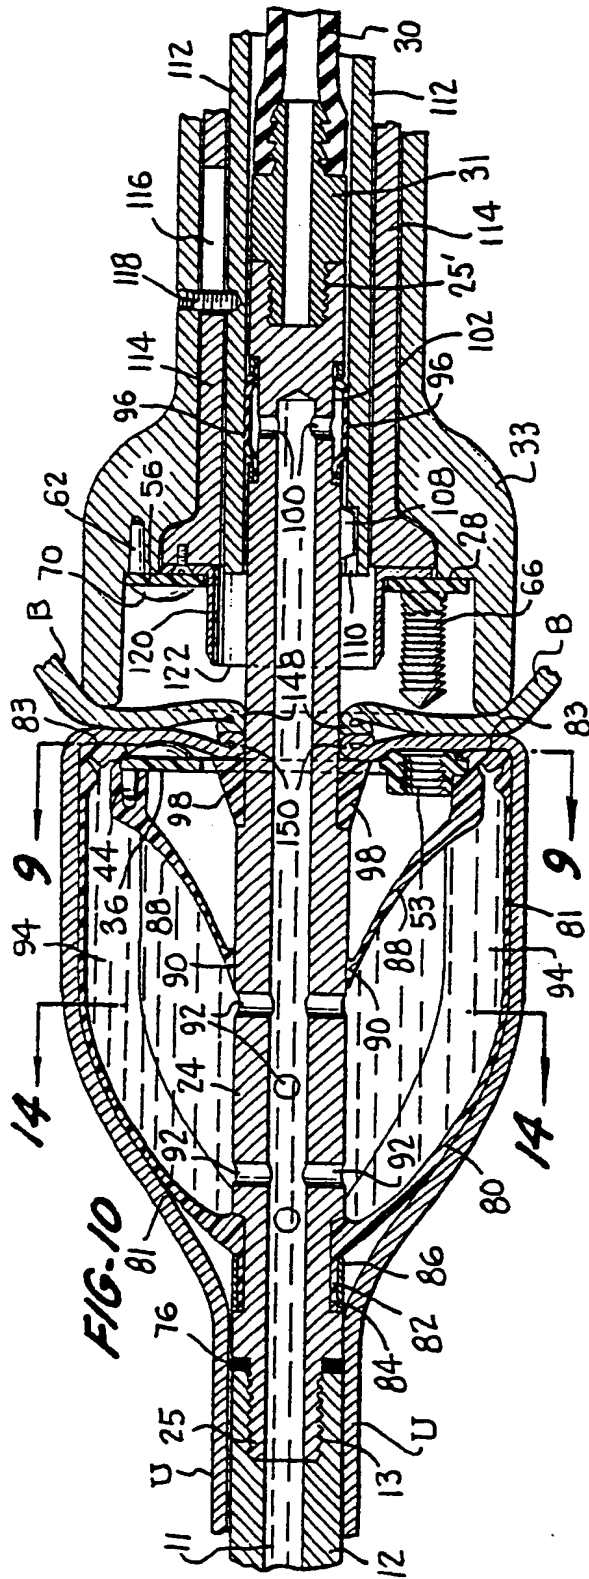

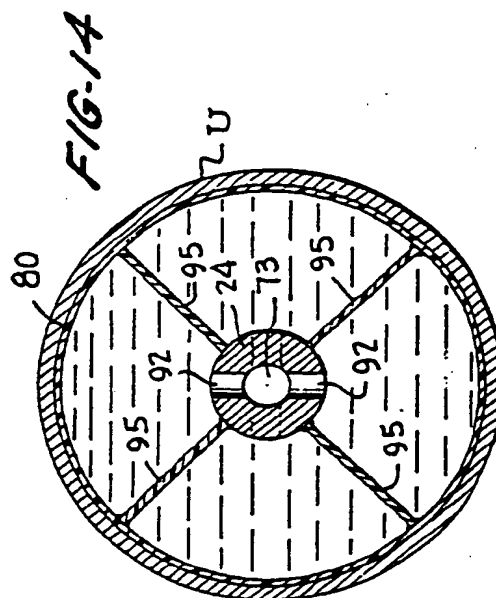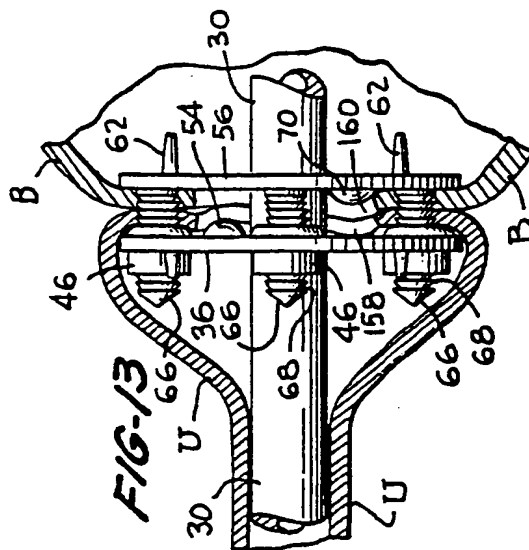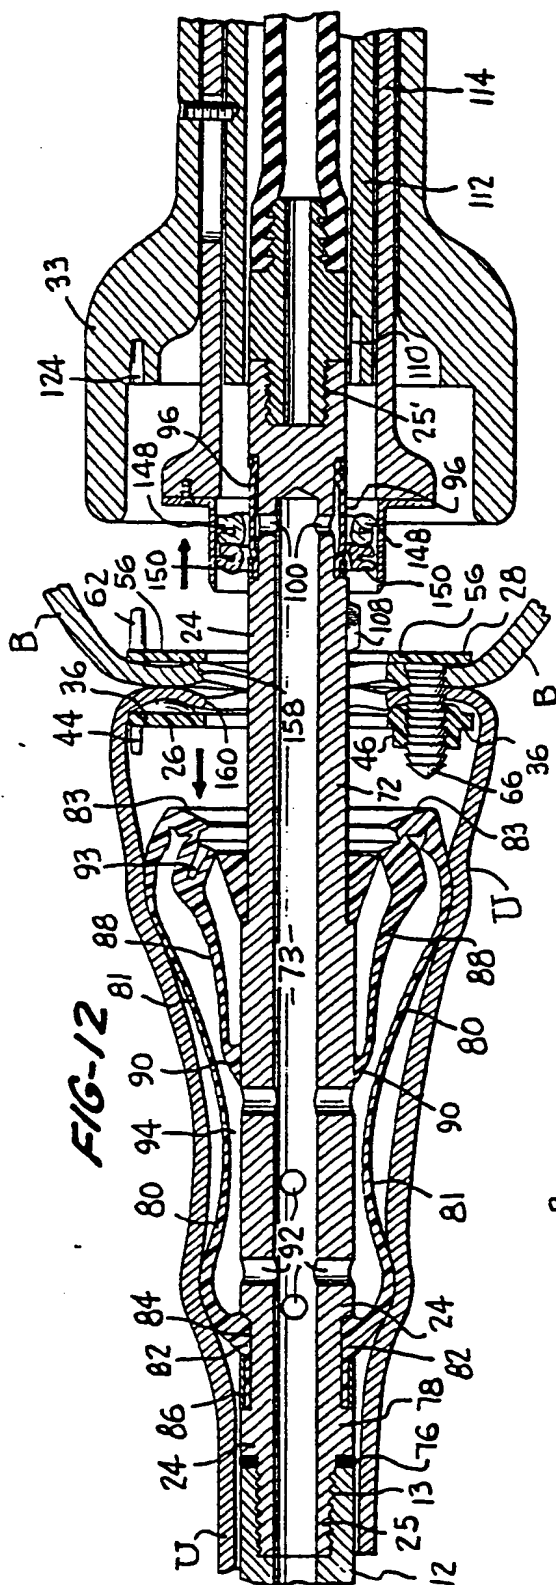



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 88 30 0851

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.4)
Y	NL-A-7 711 347 (DAANTJE) * Page 7, line 18 - page 8, line 34; figures 1-5 *	1	A 61 B 17/11
A	---	5,7,9	
Y	US-A-4 523 592 (DANIEL) * Column 3, line 6 - column 4, line 26; figures 1-7 *	1	
A	---	3,4,8	
A	US-A-4 337 775 (COOK) * Column 3, lines 28-40; figure 2 *	2,6,7, 10	
Y	FR-A-1 127 438 (LAMERIS) * Whole document *	1	
Y	US-A-4 294 255 (GEROC) * Column 1, lines 59-64; figure 1 *	1	
A	---	3,8	
A	US-A-4 137 906 (AKIYAMA) * Abstract; figures 5,6 *	2,7	TECHNICAL FIELDS SEARCHED (Int. CL.4)
A	EP-A-0 154 103 (DIMEZZA) * Abstract; figure 9 *	4	A 61 B
A,D	US-A-3 620 218 (SCHMITT) * Abstract; figure 2 *	4	
A	US-A-3 193 165 (AKHALAYA) * Column 4, lines 26-31; figure 8 *	5	
A	US-A-3 986 493 (HENDREN, III) --- -/-		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20-05-1988	Examiner KLEIN C.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	



European Patent  
Office

# EUROPEAN SEARCH REPORT

Page 2

Application Number

EP 88 30 0851

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL 4)
A	WO-A-8 400 102 (UNILINK) ---		
A,D	US-A-4 304 236 (CONTA) ---		
A	US-A-4 505 414 (FILIPI) ---		
A,D	US-A-4 485 817 (SWIGGETT) -----		
			TECHNICAL FIELDS SEARCHED (Int. CL4)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20-05-1988	Examiner KLEIN C.
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			